
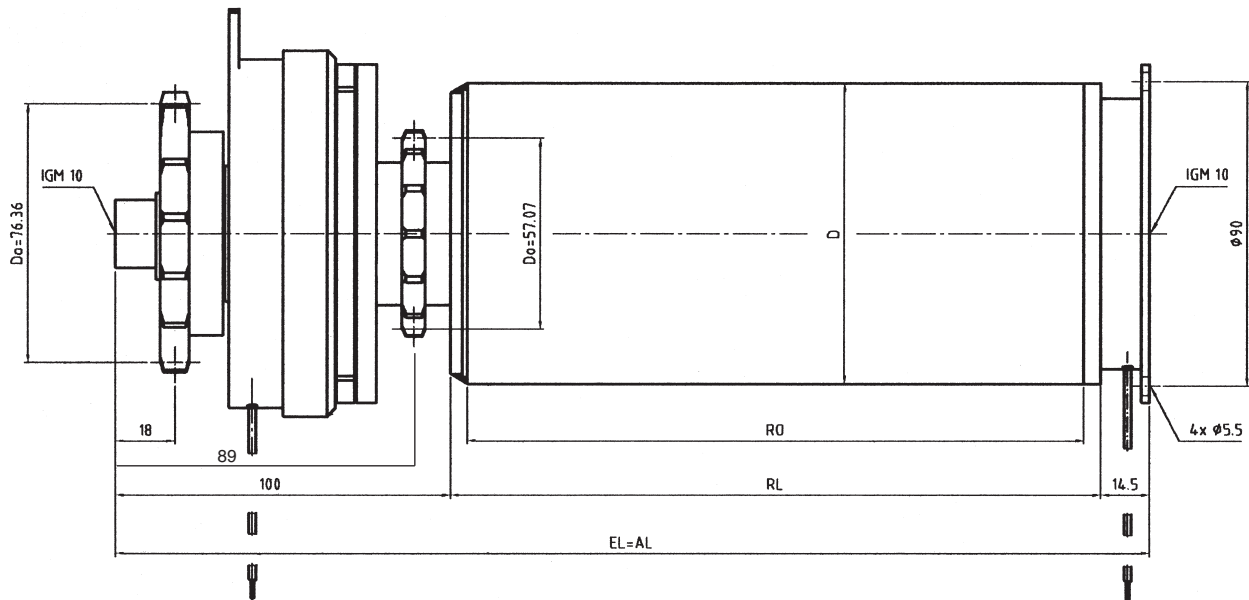


# Type 536 E Magnetic Roller with Brake

Tube Ø 88.9



Order specification		A... M...	A... AGM...	A... IGM...	A... glatt	A... SW...	A... FA...
Shaft-Ø	EL =						
25	RL+			115			

Magnetic clutch data				
max. paletten weight in kg	max. torque in Nm	voltage in V DC	max. torque in W	clutch diameter in mm
1200	40	24	32	108

### Design details:

- less wear and temperature resistant friction surface
- unlimited duty cycles
- insulation group B
- torsion free
- quiet operating system no noise development
- short contact time
- easy mounting features

### Installation instructions:

- avoid contact with oil and grease on the clutch
- nominal power: 24 VDC
- min. power requirement: 24 VDC
- do not exceed max. power by more than 10%
- ensure that the shafts are installed parallel
- the max. load for each Magnet-Roller is 200 kg