




# Conveyor Roller 600

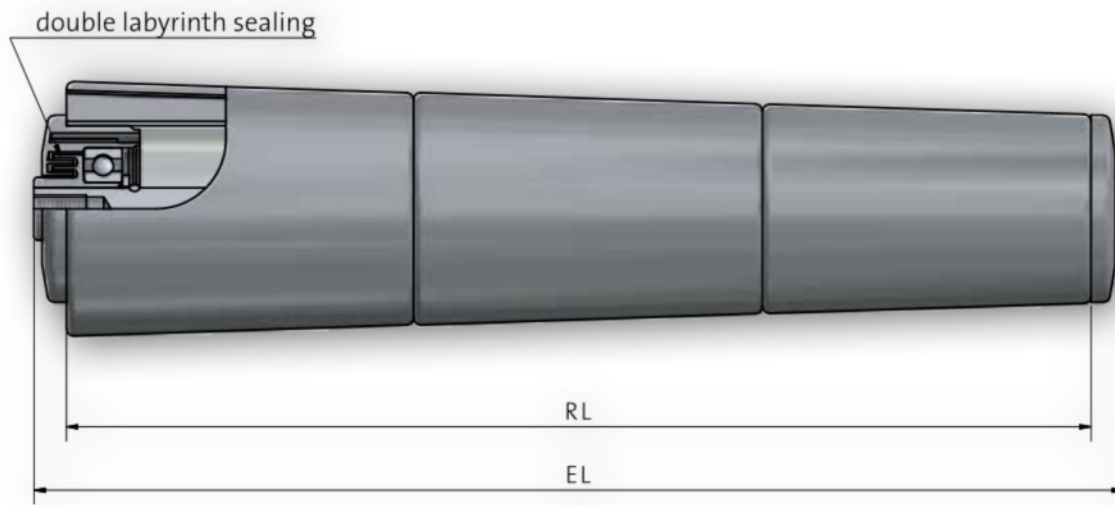

## Shaft dimensions

Order Specification		A...M...	A...JGM...
Shaft- $\phi$	EL=		
10	RL+	32	20
12	RL+	34	20
14	RL+	36	20

## Range of counter bearings for tube- and shaft combinations

Tube dia.	A10	A12	A14
50	300 / 302	300 / 302	300 / 302

# Conveyor Roller 600

<b>Bearing Type</b>	<b>Thermoplastic syntethic material - Steel housing with Precision Ball Bearing</b>
Type of Bearing	Ball Bearings (Series 6202) DIN 625 available in 2RS, ZZ Standard Series 6202 ZZ
Load Capacity/Roller	400N (depending upon the load limit of tube and shaft)
Max. Speed	0,5 m/s
Range of Temperature Celsius	-5 to +40 C
Note	For use as driven roller. Conical elements also available as antistatic version.

### Order Example

