


Roller 200

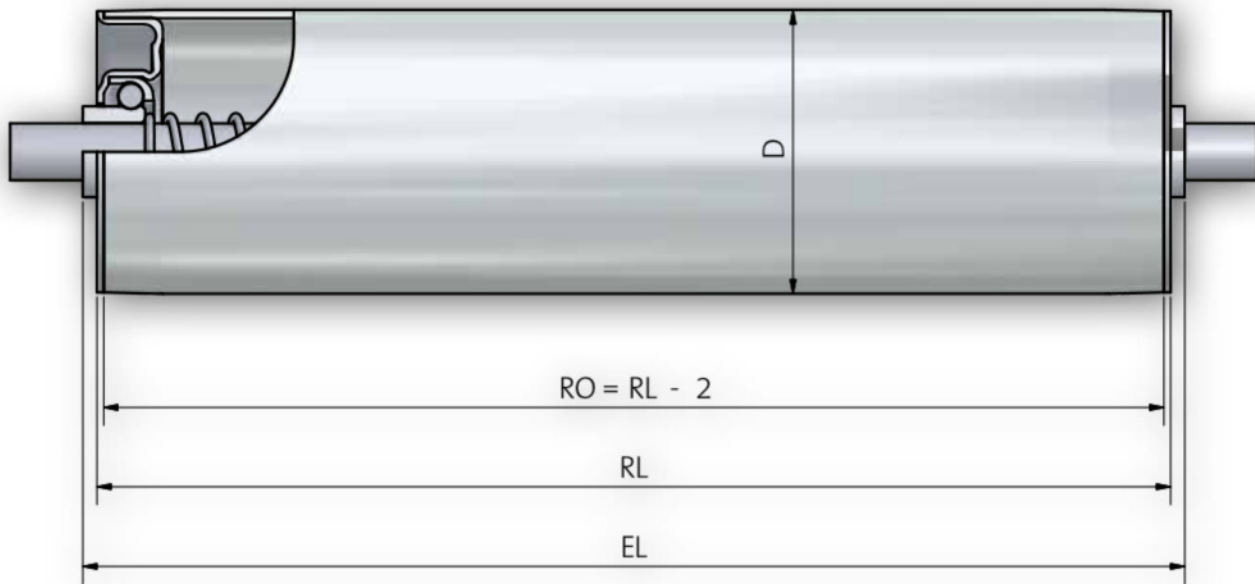

Shaft dimensions

Order Specification		A...M...	A...JGM...	A...glatt	A...SW...	A...FA...
Shaft- ϕ	EL=					
6	RL+	16		6		6
8	RL+	19		6		6
10	RL+	18	6	6	6	6
S 11	RL+			6		6
12	RL+	20	6	6	6	6

Tube- and Shaft Combination

Tube dia.	A6	A8	A10	A S11	A 12
30 x 1,5	x	x	x		
40 x 1,5		x	x	x	x
50 x 1,5	x	x	x	x	x
50 x 2		x	x	x	x
60 x 2		x	x	x	x
80 x 2			x	x	x

Roller 200

Bearing Type	Steel housing with Ball Row
Type of Bearing	Ball Row
Load Capacity/Roller	1.600N (depending upon the load limit of tube and shaft)
Max. Speed	0,6 m/s
Range of Temperature Celcius	-5 to +80 C
Optional	With special greasing even for use in Deep Freeze Areas (-28°C)
Note	Gravity Roller - not for use as driven roller.

Order Example

Type	200 - 50x1,5 STI A12 IGM 8x15 EL=500mm
Bearing Type
Tube-Ø and wall thickness
Tube quality
Shaft-Ø
Shaft Ends
Installation length