


Roller 301

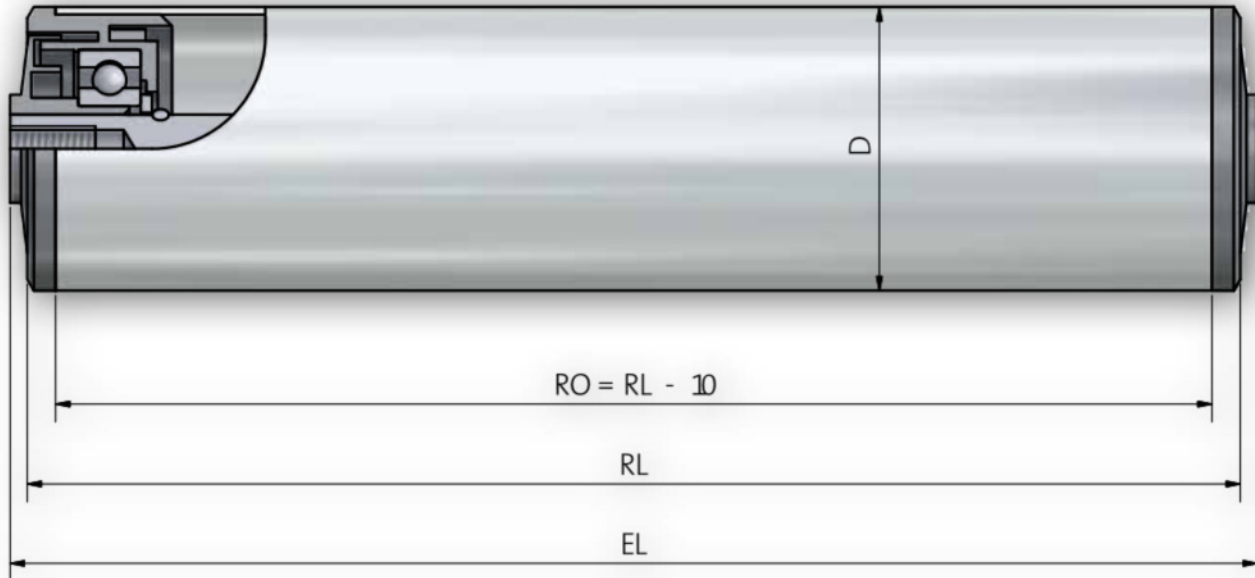

Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...glatt	A...SW...
Shaft- ϕ	EL=					
8	RL+	19	6	6	6	6
10	RL+	19	7	7	7	7
12	RL+	21	7	7	7	7
14	RL+	23	7	7	7	7
15	RL+	23	7	7	7	7
17	RL+	21	5	5	5	5

Tube- and Shaft Combination

Tube dia.	A8	A10	A12	A14	A15	A17
50 x 1,5	x	x	x	x	x	x
50 x 2,8	x	x	x	x	x	x
60 x 2	x	x	x	x	x	x
60,3 x 1,65	x	x	x	x	x	x
63 x 3	x	x	x	x	x	x
70 x 2		x	x	x	x	x
80 x 2		x	x	x	x	x
88,9 x 2,9		x	x	x	x	x

Roller 301

Bearing Type	Thermoplastic synthetic material - Bearing Site
Type of Bearing	Ball Bearings (Series 6202, 6003) DIN 625 available in 2RS, ZZ Standard Series 6202ZZ
Load Capacity/Roller	1.600N (depending upon the load limit of tube and shaft)
Max. Speed	2 m/s
Range of Temperature Celcius	-5 to +50 C
Optional	
Note	For use as driven roller.

Order Example

Type 300	301 RS - 50x1,5 STI A14 IGM 8x15 EL=500mm
Bearing Type	
Ball bearing sealing	
Tube- ϕ and wall thickness	
Tube quality	
Shaft- ϕ	
Shaft Ends	
Installation length	