


Roller 400

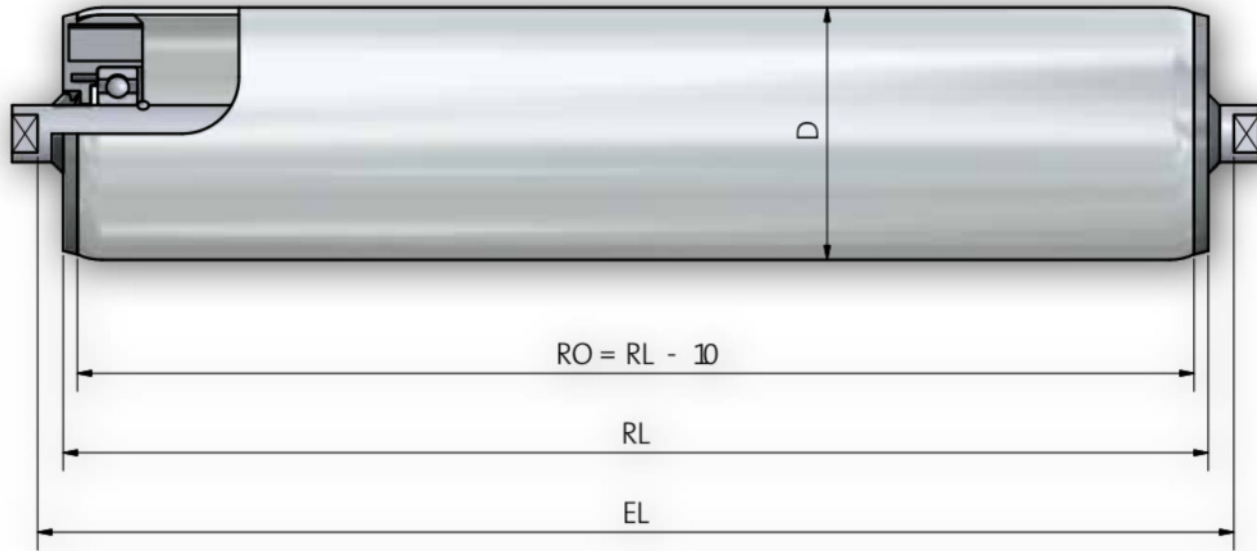

Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...SW...
Shaft- ϕ	EL=				
20	RL+	24	6	6	6
25	RL+		6	6	6

Tube- and Shaft Combination

Tube dia.	A20	A25
50 x 2	x	
60 x 2	x	
63,5 x 2,9	x	
80 x 2	x	
80 x 3	x	
88,9 x 2,9	x	x
90 x 7	x	x
108 x 3,25	x	x
133 x 3,6	x	x

Roller 400

Bearing Type	Thermoplastic synthetic material - Bearing Site
Type of Bearing	Ball Bearing (Series 6004, 6005, 6204, 6205) DIN 625 available in 2RS, ZZ - additional shelter with Felt Ring and V-Ring
Load Capacity/Roller	3.600N (depending upon the load limit of tube and shaft)
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +60 C
Optional	
Note	For use as Belt Conveyor Roller.

Order Example

Type	400 RS - 88,9x2,9 STI A20 SW 15x10 EL=950mm
Bearing Type
Ball bearing sealing
Tube- ϕ and wall thickness
Tube quality
Shaft- ϕ
Shaft Ends
Installation length