


Roller 402 K

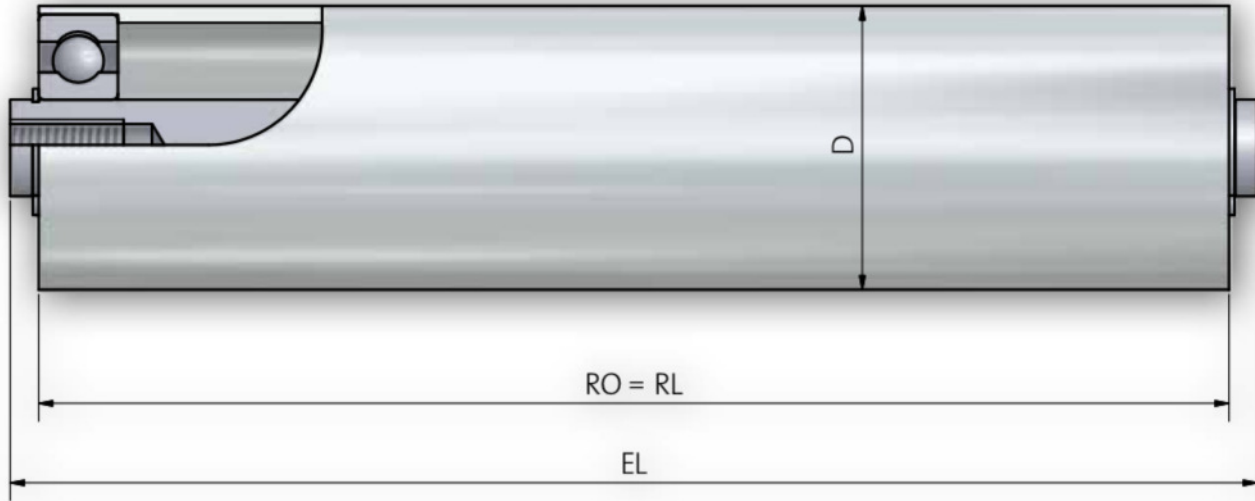

Shaft dimensions

Order Specification		A...AGM...	A...JGM...	A...SW...
Shaft- ϕ	EL=			
15	RL+	10	10	10
17	RL+	10	10	10
20	RL+	10	10	10

Tube- and Shaft Combination

Tube dia.	A15	A17	A20
40 x 3	x	x	
50 x 3		x	x

Roller 402 K

Bearing Type

Type of Bearing	Ball Bearing Site lathed into the tube Ball Bearing (Series 6003, 6202, 6204) DIN 625 available in 2RS, ZZ
Load Capacity/Roller	(depending upon the load limit of tube and shaft)
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +80 C
Optional	
Note	With special greasing even for use in Deep Freeze Areas (-28°C). Ball Bearing secured with snap rings on the shaft.

Order Example

Type	402 K RS - 50x3 STI A17 IGM 12x20 EL=950mm
Bearing Type
Ball bearing sealing
Tube-Ø and wall thickness
Tube quality
Shaft-Ø
Shaft Ends
Installation length