
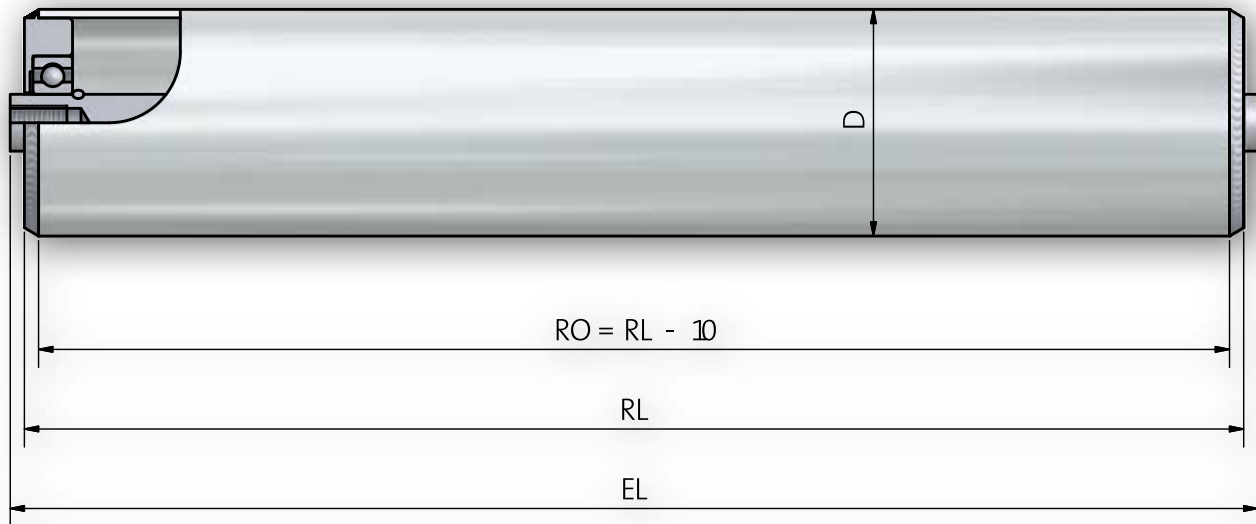





Tragrolle 400 ST



Achsausführungen

Bestell-Bezeichnung		A...M...	A...AGM...	A...IGM...	A...SW...
Achs-Ø	EL=				
20	RL+	26	6	6	6
25	RL+		6	6	6

Rohr- und Achskombinationen

Rohrabm.	A20	A25
63,5 x 2,9	x	x
80 x 3	x	x
88,9 x 2,9	x	x
108 x 3,25	x	x
133 x 3,6	x	x

Optional Beschichtungen S. 10