


## Roller 402 ST

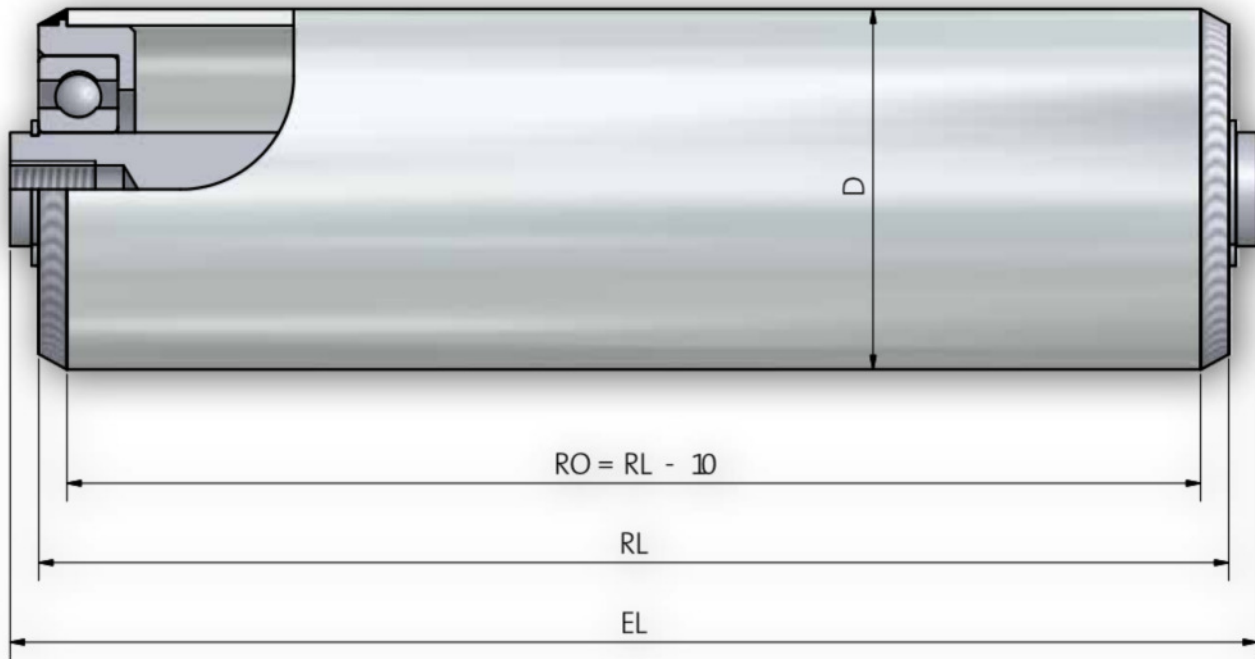

### Shaft dimensions

Order Specification		A...M...	A...AGM...	A...IGM...	A...SW...
Shaft- $\phi$	EL=				
20	RL+	26	6	6	6
25	RL+		6	6	6

### Tube- and Shaft Combination

Tube dia.	A20	A25
63,5 x 2,9	x	x
80 x 3	x	x
88,9 x 2,9	x	x
108 x 3,25	x	x
133 x 3,6	x	x

# Roller 402 ST

<b>Bearing Type</b>	<b>Steel housing with Precision Ball Bearing</b>
Type of Bearing	Ball Bearings (Series 6004, 6005, 6204) DIN 625 available 2RS, ZZ
Load Capacity/Roller	(depending upon the load limit of tube and shaft)
Max. Speed	1,2 m/s
Range of Temperature Celcius	-5 to +80 C
Optional	402 N stainless steel 1.4305
Note	With special greasing even for use in Deep Freeze Areas (-28°C). Bearing housing welded to the tube.

## Order Example

Type	402 ST RS - 88,9x2,9 ST A20 IGM 12x20 EL=950mm
Bearing Type	RS
Ball bearing sealing	ZZ
Tube-Ø and wall thickness	88,9x2,9
Tube quality	ST
Shaft-Ø	A20
Shaft Ends	IGM
Installation length	12x20 EL=950mm